

## Sankosha Finishing Solutions

Laundry

## **LP-590U Single Buck Shirt Press**

#### **Superior Quality**

## **Oversized Press Heads** Sleeve Arm Up/Down Function Handles those hard to press Our newly designed sleeve arms now XXXL shirts. move up and down to provide the proper finish on any shirt type. **Cuff and Sleeve Arm Controls** Special design makes its easy for the operator to produce the highest quality shirt. **Control Panel**

Now angled toward operator making it more user friendly.

## **LP-690U**

Single Collar Cuff Press Tensioning Type



**Prevent Shrinkage** 

- Tensioning function produces superior quality while preventing/correcting shrinkage
- · Innovative design and technology
- · Compact blueprint and easy to maintain

## **LP-190U Double Buck Shirt Press**


#### **Maximum Productivity**



**Shoulder Press**Standard Equipment for much better finishing quality.



Sleeve Arm
"Soft Tensioning" reduces
tension on the shirt's sleeve
quickly after finishing.



**Steam Injection** 

A new steam injection system covers the entire body width and with a new heated buck body, processing time is reduced.




**Blower Motor** 

More powerful motor delivers faster finishing cycle times.



Quadruple Collar & Cuff

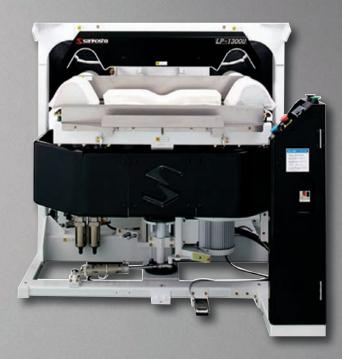

- Tensioning function supplies superior quality while preventing/correcting shrinkage
- High Productivity
- · Can accommodate up to two double bucks
- · Rotary style can handle four shirts at one time

## NEW! MF-300U Multi Garment Finisher

#### **Trustworthy Performance**

## **LP-685U**

#### Double Collar Cuff Vacuum Type



**Heated Front Clamp** Heater unit is installed, providing a better finishing quality.



**Automatic Shoulder Expander** Shoulder expander is gap free making for much better quality.



Front Clamps / Tensioning Body This feature lets the body raise up slowly to maximize finishing quality.



**Tall Clamp Unit** Clamp Unit is larger so it can hold even a small ladies blouse.

**Side Expander Unit** Side expanders are adjustable to any type of garment (such as tapered side)



**Small Footprint** Works efficiently with either two single bucks or one double buck.



**Built in Vacuum** Reduces drying time and increases production.



**Newly Designed Cuffs** The higher angle on the cuffs will accommodate smaller women's blouses as well as french cuffs.



**Tensioning Collar** The unique tensioning feature will eliminate those frustrating wrinkles from the collar.



## **Laundry Hot Head Presses**

## **AHP-218U**

Mushoom Press



## **AHP-336U**

**Double Topper Press** 



## **AHP-554U**

**Utility Press** 



## **AHP-654U**

Linen Press





#### Sankosha Factory Original Replacement Covers & Pads

Our covers and pads not only fit better and last longer, but also provide the finish quality you have come to expect and demand. By using our factory originial made products, Sankosha machines are designed to press at their optimum capacity as well as providing maximum longevity.



# Machine Specifications


PRODUCT NAME	Single Buck Shirt Press	Double Buck Shirt Press	Multi Garment Finisher	
Model	LP-590U	LP-190U	MF-300U	
Power	220V 3ph 10A	220V 3ph 12A	220V 3ph 8.0A	
Weight	1520lb/690kg	2425lb/1100kg	463lb/210kg	
Air Consumption	1.87 cfm	2 cfm	5 cfm	
Steam Consumption	3 BHP	5 BHP	1.5 BHP	
Air Pressure	85 psi / 0.6 MPa	85 psi / 0.6 MPa	72.5 psi / 0.5 MPa	
Steam Pressure	85 psi / 0.6 MPa	85 psi / 0.6 MPa	72.5 psi / 0.5 MPa	
Air Connection	3/8	3/8B	3/8B	
Steam Connection	Inlet: 3/4, Outlet: 1/2 x 3	Inlet: 3/4, Outlet: 1/2B x 3	Inlet: 1/2B, Outlet: 1/2B	
Dimension (mm) (W x D x H) (inch)	2470 x 1200 x 2000 93.7" x 47.3" x 78.8"	2380 x 2250 x 2100 97.3" x 88.6" x 82.7"	1845 x 1185 x 1600 72.6" x 46.7" x 63.0"	

PRODUCT NAME	Quadruple Collar & Cuff Tensioning Type	Double Collar Cuff Vacuum Type	Single Collar Cuff Tensioning Type	
Model	LP-1300U	LP-685U	LP-690U	
Power	220V 3ph 4.6A	220V 3ph 1.6A	110-220V Single ph 0.8-0.4A	
Weight	1165lb/529kg	639lb/290kg	484lb/220kg	
Air Consumption	5.1 cfm	0.5 cfm	0.8 cfm	
Steam Consumption	1.5 BHP	1 BHP	1 BHP	
Air Pressure	87 psi / 0.6 MPa	85 psi / 0.6 MPa	85 psi / 0.6 MPa	
Steam Pressure	87 psi / 0.6 MPa	85 psi / 0.6 MPa	85 psi / 0.6 MPa	
Air Connection	3/8B	3/8B	3/8B	
Steam Connection	Inlet: 1/2B, Outlet: 1/2B	Inlet: 1/2B, Outlet: 1/2B	Inlet: 1/2B, Outlet: 1/2B	
Dimension (mm) (W x D x H) (inch)	1360 x 1400 x 1255 53.5" x 55.1" x 49.4"	1000 x 880 x 1525 39.4" x 34.6" x 60.0"	710 x 1000 x 1610 28.0" x 39.4" x 63.4"	

PRODUCT NAME	Hot Head Press					
Model	AHP-218U	AHP-336U	AHP-554U	AHP-654U		
Power	110-220V Single ph 0.14A	110-220V Single ph 0.14A	110-220V Single ph 0.14A	110-220V Single ph 0.14A		
Weight	496lb/225kg	595lb/270kg	726lb/330kg	792lb/360kg		
Air Consumption	0.18 cfm	0.5 cfm	0.5 cfm	0.5 cfm		
Steam Consumption	0.5 BHP	1 BHP	1.5 BHP	2 BHP		
Air Pressure	73 psi / 0.5 MPa	73 psi / 0.5 MPa	73 psi / 0.5 MPa	73 psi / 0.5 MPa		
Steam Pressure	73 psi / 0.5 MPa	73 psi / 0.5 MPa	73 psi / 0.5 MPa	73 psi / 0.5 MPa		
Air Connection	3/8B	3/8B	3/8B	3/8B		
Steam Connection	Inlet: 1/2B, Outlet: 1/2B	Inlet: 1/2B, Outlet: 1/2B	Inlet: 1/2B, Outlet: 1/2B	Inlet: 1/2B, Outlet: 1/2B		
Dimension (mm) (W x D x H) (inch)	720 x 996 x 1605 28.4" x 39.2" x 63.2"	1220 x 946 x 1615 48.1" x 37.3" x 63.6"	1500 x 996 x 1670 59.1" x 39.2" x 65.8"	1500 x 996 x 1685 59.1" x 39.2" x 66.3"		
Buck Size	17.7" x 8.2"	35.8" x 12" x 5.3"	54" x 18.1" x 10.2"	54" x 18"		

These specifications may change without notice.

## **Layout Combinations**

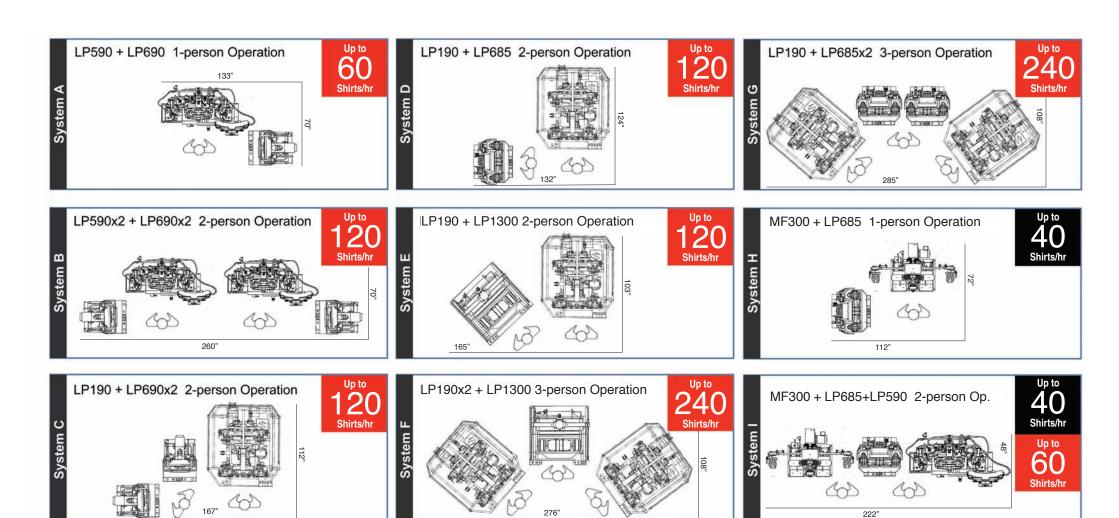



# Best Dressed™

SANKOSHA U.S.A., Inc.

